

iCGRS System Technical Specifications

Measurement Precision¹

- C/A (>10° elevation)
- Pseudo-range: 25 cm/ 3.6 cm (raw/ smooth)²
- Carrier phase: 0.9 mm

P-Code AS Off (>10° elevation)

- L1 Pseudo-range: 15 cm/ 0.9 cm (raw/smooth)²
- L1 Carrier phase: 0.9 mm
- L2 Pseudo-range: 21 cm/ 1.3 cm (raw/smooth)²
- L2 Carrier phase: 0.9 mm

P-Code AS On (Z-Tracking)

- L1/ L2 Pseudo-range (raw/ smooth)²
- 10 – 30° Elevation: 120 cm/ 20 cm
- 30 – 50° Elevation: 25 cm/ 6 cm
- > 50° Elevation: 10 cm/ 3 cm

L1/L2 Carrier phase

- >10° Elevation: 1.4 mm

Systematic Errors (Between Satellites)

- Pseudo-range (all bands): < 1.00 cm
- Carrier phase (all bands): < 0.01 cm

System Components

iCGRS Receiver

- 12-channel all-in-view operation
- Patented Z-Tracking technology
- Full tracking of L1 C/A Code, L1/L2 P Code, and L1/L2 full-cycle carrier
- 32 MB memory
- 4-LEDs; power/SV; raw observable data logging; MET/TILT data logging/Ethernet activity
- 4 independent programmable serial ports
- 1 Ethernet port to five IP addresses
- Remote monitoring capability
- External frequency input (5, 10, 20 MHz)
- Real-time data outputs
- Zmodem protocol
- NMEA 0183 message outputs
- Session programming
- Rugged construction
- 5 Hz data output
- Receiver reference manual
- 1-year warranty
- Free technical support

Choke Ring Antenna

- 100% IGS compatible choke ring design
- Dorne & Margolin C146 dipole antenna element
- Proprietary Magellan low-noise amplifier (LNA)

Cables

- 30 m antenna cable
- 60 m antenna cable
- Car battery cable
- Power cable
- Power Y-cable
- Single RS-232 data cable
- Dual RS-232 data cable
- Ethernet cable with RJ-45 jack plug
- 1 PPS timing signal (5V TTL) plus serial cable
- Dual Met/Serial I/O cable

Power

- 110/ 220 VAC 50/ 60 Hz UL, CE Power Supply
- Softcase Battery
- Battery Charger

Communications

- 4 bi-directional RS-232 serial ports (115,200 baud rate)
- Ethernet connector for direct Internet connectivity

Environmental and Physical Specifications

Dimensions

- Inches: 2.5 H x 7.01 W x 9.6 D
- cm: 6.3 H x 17.8 W x 24.3 D

Weight

- Receiver: 3.75 lbs. (1.7 kg)
- Antenna: 9.41 lbs. (4.3 kg)

Power

- 10-28 VDC, 8.0W Max, 6.6W nominal

Temperature Ranges Receiver

- Operating: -40°C to +55°C (-38°F to +131°F)
- Storage: -40°C to +85°C (-38°F to +185°F)

Choke Ring Antenna

Temperature Ranges

- Operating: -40°C to +65°C (-38°F to +149°F)
- Storage: -55°C to +75°C (-65°F to +167°F)

Environmental

- Meets MIL STD 810E for wind-driven rain and dust.

Optional Accessories and Features

- 128 MB memory upgrade
- Fast data output (10 Hz)
- Real-time Kinematic (RTK) broadcast capability for centimeter-level accuracy
- RTCM message outputs (1, 2, 3, 6, 9, 16, 18/19, 20/ 21, 22)
- Geodetic IV antenna with removable groundplane
- GNSS Solutions™ Post-processing Software

Ordering Information

- Receiver Part Number
iCGRS Receiver 990504-128

¹ Precision specifications are rms values for the lowest possible signal strengths as specified in ICD-GPS-200B.

² The iCGRS provides both raw pseudo-range and a smoothing correction. Applying the smoothing correction to the raw pseudo-ranges yields the high accuracy pseudoranges.


Survey Solutions Contact Information:

In France +33 2 28 09 38 00 ■ Fax +33 2 28 09 39 39
In Germany +49 81 6564 7930 ■ Fax +49 81 6564 7950
In Russia +7 495 956 5400 ■ Fax +7 495 956 5360
In the Netherlands +31 78 61 57 988 ■ Fax +31 78 61 52 027
Email surveysalesemea@magellangps.com



In Singapore +65 6235 3678 ■ Fax +65 6235 4869
In China +86 10 6566 9866 ■ Fax +86 10 6566 0246
Email surveysalesapac@magellangps.com
www.pro.magellanGPS.com



iCGRS™ System

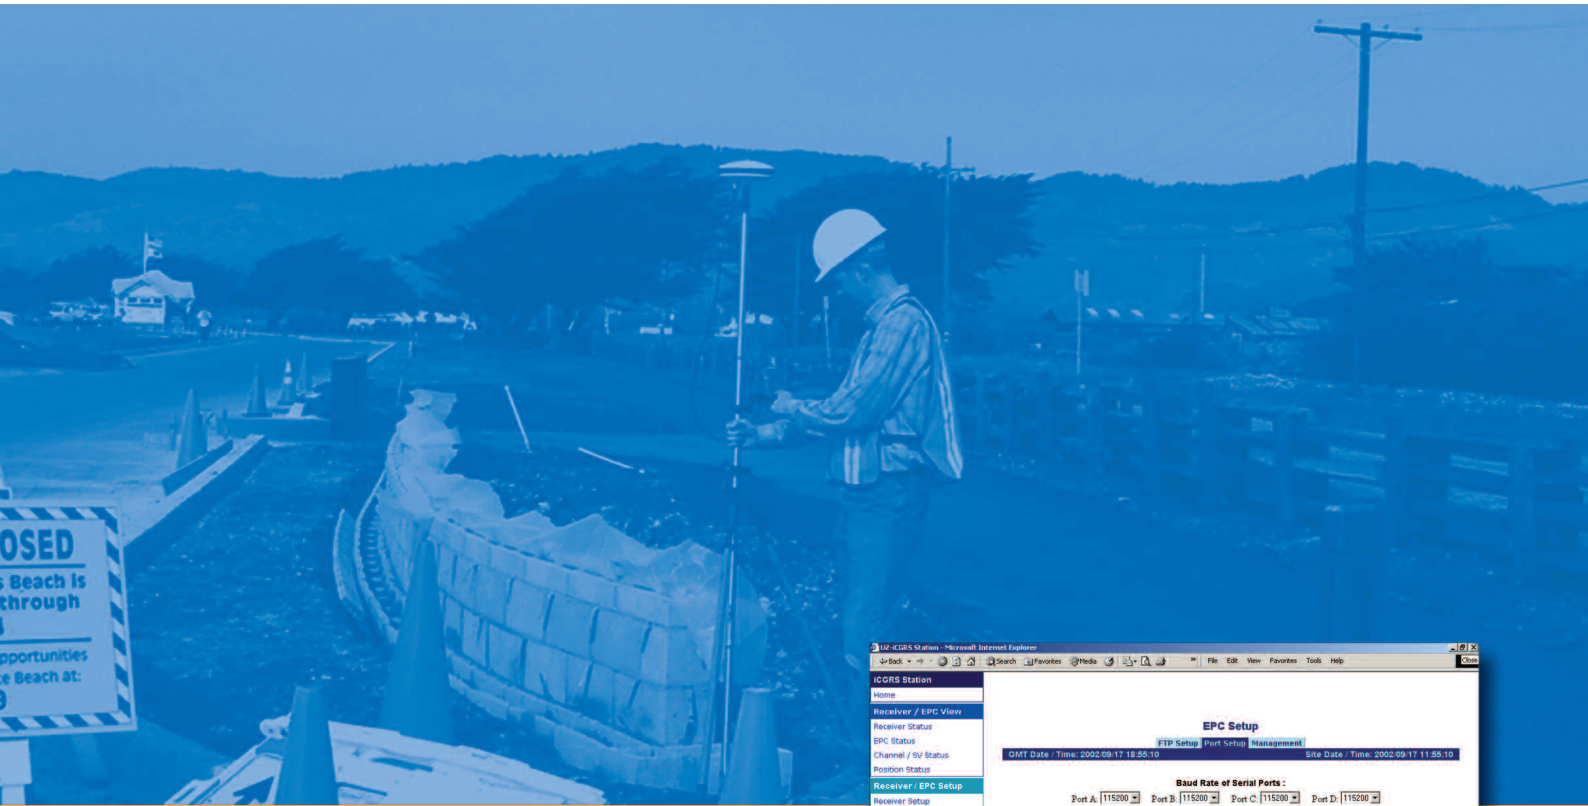

Internet-Enabled Geodetic Reference System

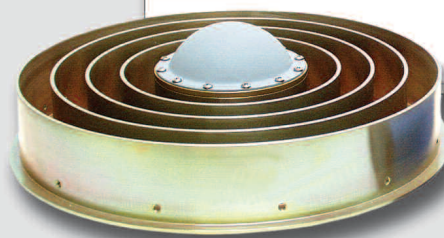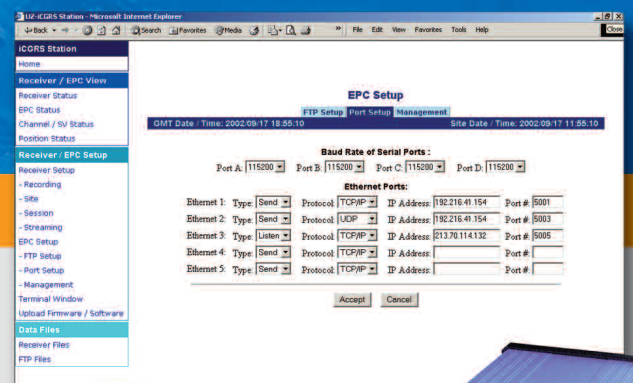


Stream Data in Real Time!

iCGRS System

The Internet-Enabled Continuous Geodetic Reference Station (iCGRS™) from Magellan provides you with direct Internet connectivity for the world's most powerful GPS reference station technology. Designed for high-accuracy applications, the iCGRS system is ideal as a permanent GPS base station that is directly connected to the Internet. You can communicate with the receiver through a simple Web page interface.

The iCGRS system has been designed to meet the stringent requirements of continuous unattended operation for the collection of high-quality, dual-frequency GPS data. Data files can be downloaded from the iCGRS while the receiver continues tracking and logging data, and you can stream data in real time. External frequency input is standard. Now there is no need to use an expensive, power hungry external PC to connect your reference station to the Internet.

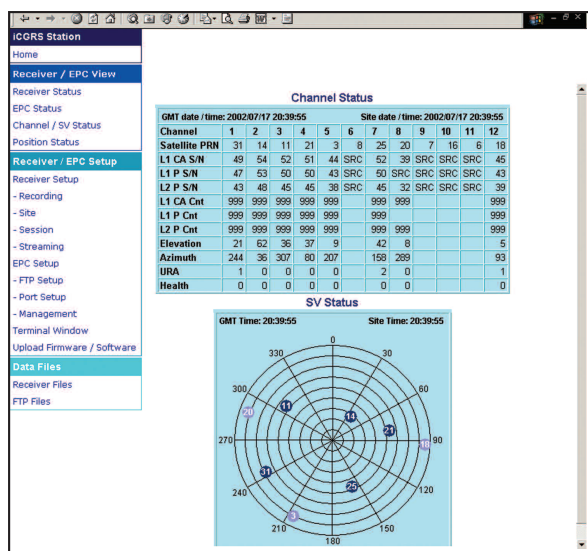

The status of each tracking channel and the location of each satellite in view are displayed in a single window.

Communication Protocol Options

The iCGRS provides a choice of Internet communication protocols for different applications, including TCP/IP or UDP for data streaming, FTP for file transfer, and HTTPS for Web page access. Zmodem protocol is supported on the serial ports.

Real-Time Data Streaming

One of the main advantages of the iCGRS is its ability to stream raw data and RTCM corrections in real time. The iCGRS provides addressing for up to five independent Ethernet ports. Available streaming protocols are TCP/IP and UDP, and the receiver can either act as a server or client for these ports. Available raw data types include Magellan proprietary MBN, PBN, DBN, and SNV, as well as BINEX data. RTCM V 2.3 corrections are also available for streaming.

Networks such as the U.S. and Canadian Coast Guards' Differential GPS network, Southern California Integrated GPS Network, National Geodetic Survey's CORS network, the Bay Area Regional Deformation network, the China Seismological Bureau, and the Shanghai Multi-Function Reference Network rely on Magellan reference stations.

Internet Connection

The iCGRS connects directly to a network using Ethernet. We provide a cable with an RJ-45 connector for direct network connection. Once connected you can control, monitor, and download data using a Web browser or directly through the IP connection. You can also set up automatic FTP downloading of data, or stream data in real time.

The screenshot displays the 'Session Programming' section of the iCGRS web interface. It includes tabs for 'Auto Configuration' and 'Manual Configuration'. The 'Auto Configuration' tab is active, showing a table with columns for Session Number, Session ID, Use, Start Time, End Time, Interval, Elevation, Min. SVs, and Data Type. The table contains 12 rows of session data.

Session Number	Session ID	Use	Start Time	End Time	Interval	Elevation	Min. SVs	Data Type
1	A	Yes	00:00:00	00:14:59	030.0	15	3	72N
2	B	Yes	00:15:00	00:29:59	030.0	15	3	72N
3	C	Yes	00:30:00	00:44:59	030.0	15	3	72N
4	D	Yes	00:45:00	00:59:59	030.0	15	3	72N
5	E	Yes	01:00:00	01:14:59	030.0	15	3	72N
6	F	Yes	01:15:00	01:29:59	030.0	15	3	72N
7	G	Yes	01:30:00	01:44:59	030.0	15	3	72N
8	H	Yes	01:45:00	01:59:59	030.0	15	3	72N
9	I	Yes	02:00:00	02:14:59	030.0	15	3	72N
10	J	Yes	02:15:00	02:29:59	030.0	15	3	72N
11	K	Yes	02:30:00	02:44:59	030.0	15	3	72N
12	L	Yes	02:45:00	02:59:59	030.0	15	3	72N

You can easily program recording sessions through a browser window.



iCGRS back panel

Automatic E-mail Reporting

In the event of an error condition, the iCGRS can send an e-mail notification automatically to the system administrator. Other levels of e-mail reporting are possible, including a complete EPC process status report.

Advanced Session Programming

The iCGRS can be programmed to automatically create sessions as short as 15 minutes. The Web GUI includes a simple tool to configure session parameters, including time span, recording interval, satellite elevation, and data recording mode. Once the parameters are defined for one session, the GUI will generate the parameters for all sessions based on the session duration.

More Value for Your Investment

Receiver Setup

Recording Site Session Streaming

GMT Date / Time: Site Date / Time

☐ Raw Data
Data Type: ☐ MBN ☐ PBN ☐ DBN ☐ SNV
Data Format: ☐ ASCII ☒ Binary
Interval: 20.00 Seconds

☐ Binex Data
Data Type: [0] 0x0 [0] 0x1 [0] 0x7E [0] 0x7F

☐ RTCMBase
Message Type: [0] 1 [0] 2 [0] 3 [] 6 [0] 9
[0] 16 [0] 18/19 [0] 20/21 [0] 22
Type 16 Message:
Station ID: Speed: [0] REF Health: [0] EOT: None

Accept Cancel



Position Status	
GMT date: 2002/07/17	Site date: 2002/07/17
GMT time: 20:40:54	Site time: 20:40:54
Latitude:	37 21.073972 N
Longitude:	121 58.129712 W
Height:	00014.823 m
# of SVs Tracked:	8
# of SVs Used:	5
PDOP:	04.1
HDOP:	01.5
VDOP:	03.9
TDOP:	02.5

The status of each tracking channel and the location of each satellite in view are displayed in a single window.

Full Met/Tilt Sensor Integration

The iCGRS is easily integrated with a meteorological sensor and/or a tilt meter. The user can connect to both sensor types simultaneously. Met and Tilt data are logged and can be downloaded together with the GPS data, or streamed in real time.

Choke Ring Antenna For High Precision

The iCGRS System is available with the high-precision L1/L2 Choke Ring antenna. This antenna is the accepted design for the International GPS Service (IGS) tracking network, the Southern California Integrated GPS Network (SCIGN), and numerous other networks around the world.

Powerful Z-Tracking Technology

The iCGRS system is built upon our field-tested and patented Z Technology™ for high Signal to Noise ratios on L2. This means uninterrupted operation during Anti-Spoofing (AS) and large ionospheric activity. Standard features of the iCGRS receiver include all-in-view 12-channel operation, multi-bit signal processing for RF jamming immunity, and SAW filtering techniques.

Optional Geodetic IV Antenna

The Geodetic IV™ antenna with removable ground plane is available as an option. This is the standard antenna offered with all Magellan Professional RTK systems and provides a lower cost alternative to the choke ring antenna.

Optional RTCM SC-104 V 2.3 Broadcast

Even while the iCGRS is logging precise GPS data, it can broadcast RTCM-104 v 2.3 corrections to users for DGPS and RTK. This option allows you to easily use the same receiver for multiple tasks, providing you more value for your investment.

A Complete Multi-Function Reference Station Solution

Magellan Professional reference stations have set the industry standard for high precision continuous operation. With the introduction of the iCGRS system, powerful easy-to-use reference station technology can be easily accessed directly through the Internet.